
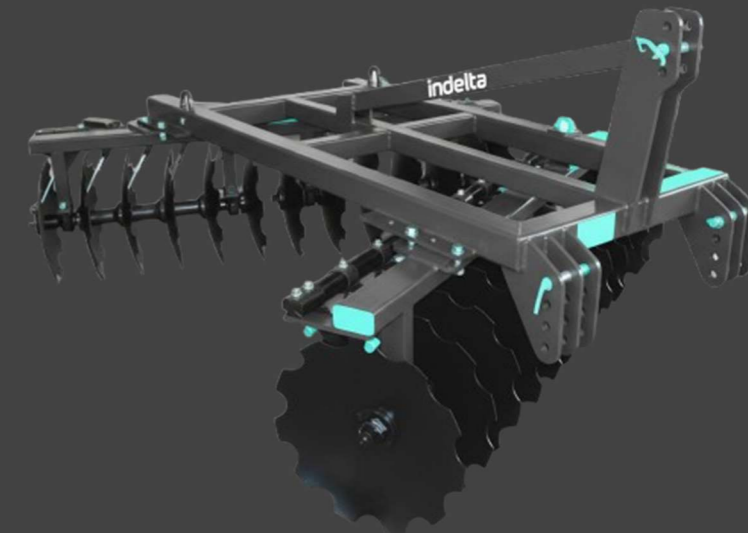


### INDELTA EQUIPMENT TRAILED DISC HARROWS V&X -SHAPE

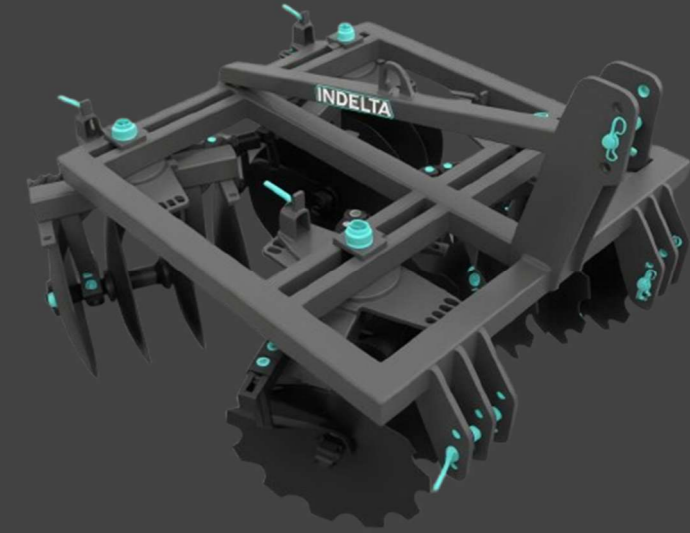

**TRAILED DISC HARROWS V&X -SHAPE**

Trailed disc harrows, suspended to the three points of the tractor, are strong and solid machines, very small and projected to adapt to vineyards and orchards which soil is particularly irregular and stony.

The small dimension favors to work fast and to work all over the whole surface without leaving any areas uncultivated.

The SX disc harrows can go equipped with a central shank. This way the whole surface is cultivated.

The disc frame of SX model is individually adjustable, to respond to the exigencies of the vineyards as long as the whole year, according three main positions (X-shape, X-Inside, X-Outside)

Technology applied is the same as the one employed in bigger machines and for big areas.

That is the reason why trailed disc harrows are strong machine, absolutely reliable for hard soils such as vineyards and orchards.





## TRAILED DISC HARROWS (SV180 22" /560mm.\*4.50mm.)




	WORKING WIDTH	DISCS	DEPTH MAX.	DISCS SPACING	BEARINGS	FRAEME SECTION	DISCS FRAME	ROWBAR POWER	WEIGHT
MODEL	M.	N°	mm.	mm.	N°	mm.	mm.	hp	Kg.
ID-SV170-16	1.70	16	200	180	6	100*100*6	80*80*6	40	600
ID-SV188-18	1.88	18	200	180	8	100*100*6	80*80*6	45	625
ID-SV205-20	2.05	20	200	180	8	100*100*6	80*80*6	50	650
ID-SV223-22	2.23	22	200	180	8	100*100*6	80*80*6	55	675
ID-SV240-24	2.40	24	200	180	8	100*100*6	80*80*6	60	700

## TRAILED DISC HARROWS (SV225 24" /610mm.\*5mm.)




	WORKING WIDTH	DISCS	DEPTH MAX.	DISCS SPACING	BEARINGS	FRAEME SECTION	DISCS FRAME	ROWBAR POWER	WEIGHT
MODEL	M.	N°	mm.	mm.	N°	mm.	mm.	hp	Kg.
ID-SV175-16	1.75	16	230	225	6	100*100*6	120*60*6	50	825
ID-SV198-18	1.98	18	230	225	8	100*100*6	120*60*6	55	850
ID-SV221-20	2.21	20	230	225	8	100*100*6	120*60*6	60	900
ID-SV244-22	2.44	22	230	225	8	100*100*6	120*60*6	65	950
ID-SV267-24	2.67	24	230	225	8	100*100*6	120*60*6	70	1000

### TRAILED DISC HARROWS (SX180 22" /560mm.\*4.5mm.)

	WORKING WIDTH	DISCS	DEPTH MAX.	DISCS SPACING	BEARINGS	FRAEME SECTION	DISCS FRAME	ROWBAR POWER	WEIGHT
MODEL	M.	N°	mm.	mm.	N°	mm.	mm.	hp	Kg.
ID-SX140-12	1.40	12	200	180	8	80*80*5	80*80*6	30	500
ID-SX185-16	1.85	16	200	180	8	80*80*5	80*80*6	40	650
ID-SX220-20	2.20	20	200	180	8	80*80*5	80*80*6	50	775
ID-SX250-24	2.50	24	200	180	8	80*80*5	80*80*6	60	900

### TRAILED DISC HARROWS (SX225 24" /610mm.\* 5.00mm.)

	WORKING WIDTH	DISCS	DEPTH MAX.	DISCS SPACING	BEARINGS	FRAEME SECTION	DISCS FRAME	ROWBAR POWER	WEIGHT
MODEL	M.	N°	mm.	mm.	N°	mm.	mm.	hp	Kg.
ID-SX200-16	2.00	16	230	225	8	80*80*6	80*80*6	50	850
ID-SX247-20	2.47	20	230	225	8	80*80*6	80*80*6	60	950
ID-SX294-24	2.94	24	230	225	8	80*80*6	80*80*6	70	1050


#### STANDARD EQUIPMENT

- Ideal for vineyards
- Adjustable scraper - one for each disc.
- Discs: 22" / 560x4,50mm. with self-aligning ability bearing. No maintenance or lubricant required.
- Discs: 24" / 610x5,00mm. with supports of ball bearing with seals which keep away dust or any other element which could damage the support.
- Squared axle 30x30.
- Discs divider cast-iron.

#### OPTIONS



225mm.




SX




**Trailed disc harrows with discs of 22"/560mm. are equipped with self-aligning ability bearing.**

**Trailed disc harrows with discs of 24"/610mm. are equipped with waterproof ball bearings.**


**Both make these machines able to resist every kind of**

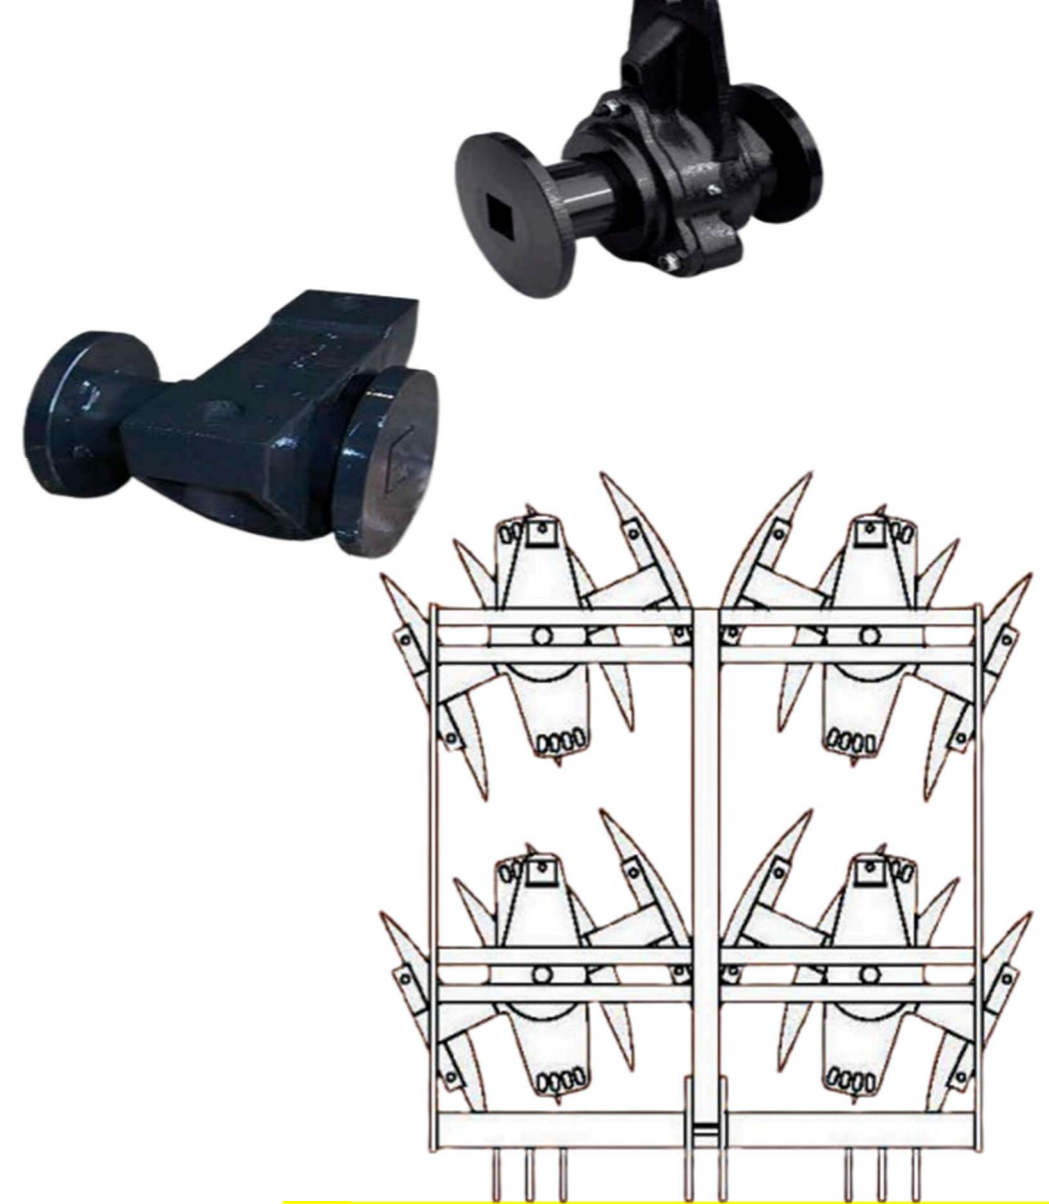

**The disc frames of SX model are individually 360° adjustable, to respond to the exigencies of vineyards as long as the whole year.**

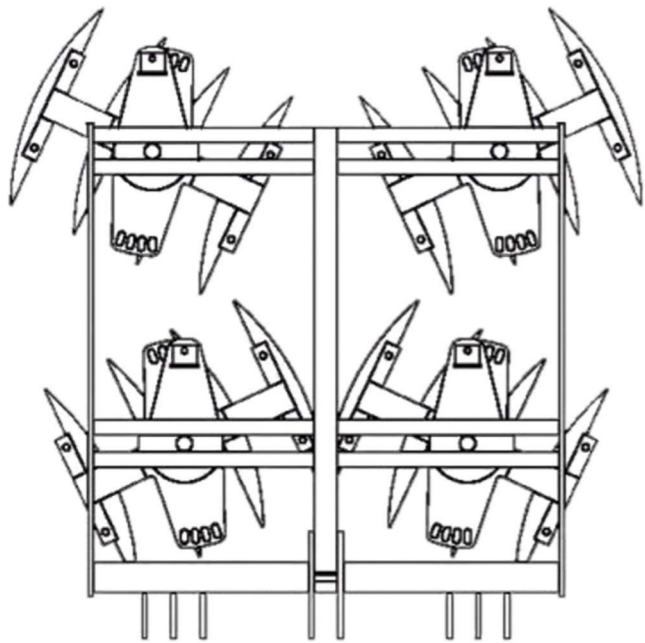

**X-shape train of discs disposition is perfect to bury superficial stubble.**

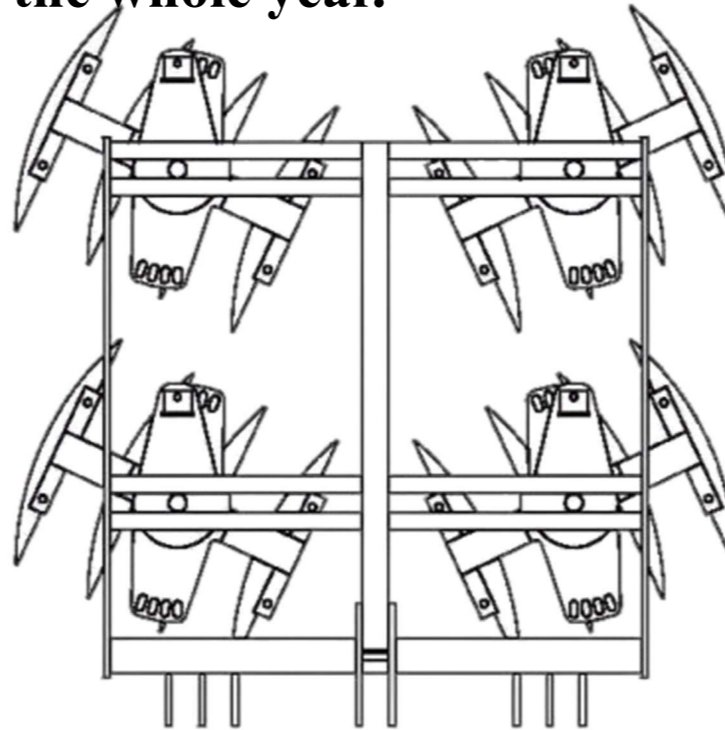

**Outside train of discs disposition is perfect to launch the earth to the foot of vineyard and protect it from frost, favoring the flow of water.**

**Inside train of discs disposition is perfect to free foot of vineyard of earth and avoid the formation of roots.**