




INDELTA EQUIPMENTS STRAIGHT LINE SUBSOILERS

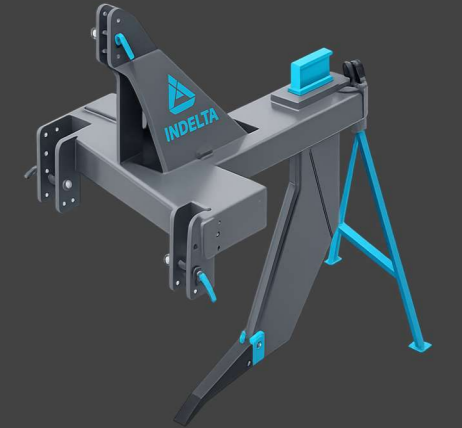

INDELTA Subsoilers – Power Meets Precision

INDELTA straight-line subsoilers are the ideal solution for working with large amounts of stubble in dry and hard soils, especially in sweet corn cultivation. Unlike other equipment, they handle strong cane residues effortlessly. The stubble passes smoothly through the rows without dragging, ensuring uninterrupted operation even at depths of up to 60 cm



INDELTA straight-line subsoilers are built strong and robust, featuring a tubular frame of 180x180x12 mm without any welds. With a weight ranging from 1700 to 2150 kg, they deliver optimized soil penetration thanks to the ergonomic design and positioning of the shanks, row spacing, and conventional tips. This ensures effective fracturing of compacted soil with minimal surface disturbance. For best results, the use of rollers is recommended to control working depth, pulverize clods, level the soil, and seal it to reduce moisture loss


All INDELTA models feature adjustable hitch and shank height, offering up to 3 or 4 positions to adapt perfectly to different soil conditions. Upon request, the number of positions can be increased to meet specific requirements.



INDELTA subsoilers feature a fully adjustable chassis, reinforced at the 3-point hitch and shank seats to eliminate the risk of deformation during operation, even under the most extreme working conditions.

INDELTA rollers are equipped with self-aligning double ball bearings. Even if the axle is damaged during operation, the bearings keep the roller in position, allowing the work to continue smoothly and efficiently.

INDELTA engineering optimizes the angle of attack, making penetration easier while requiring the least possible horsepower to pull.

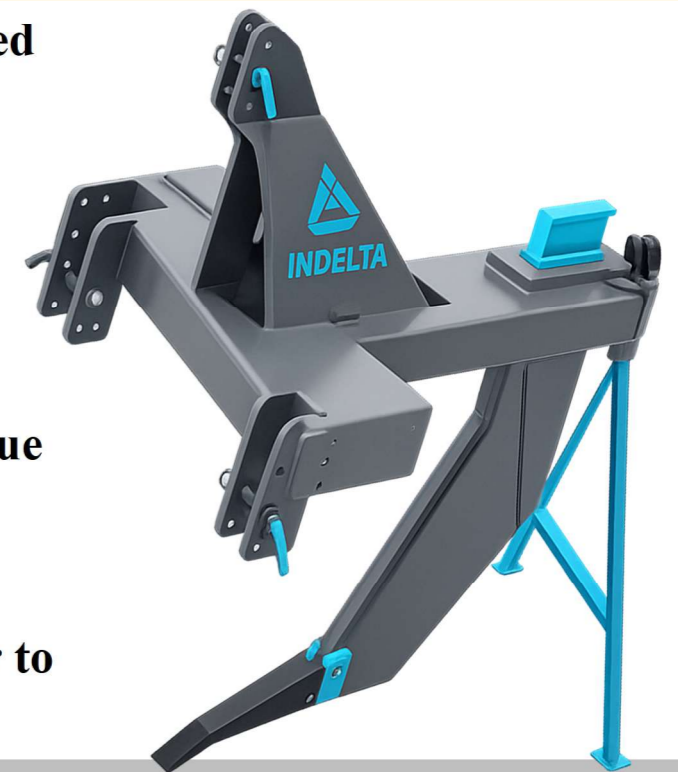

STANDARD EQUIPMENT:

- Frame with adjustable hitch
- Reinforced 3-point hitch
- Adjustable width shanks (3/4 positions)
- Front replaceable sharpened shin on shanks
- Parking stand
- Spiked roller
- Conventional tip



Options:



INDELTA		WORKING WIDTH	TINES	TINES SECTION	TINES SPACING	FRAME SECTION	DEPTH MAX.	CLEARANCE	POWER APROX.	ROLLER	WEIGHT W/O ROLLER	WEIGHT WITH ROLLER
SS-FR	+ROLLER	M.	N`	MM.	MM.	MM.	MM.	MM.	HP	Ø	KG	KG
SS53FR	SS3R-NS	2.30	5	40*180	460	150*150*10	550	780	90/160	Ø515	860	1100
SS73FR	SS5R-NS	2.95	7	40*200	420	180*180*12	600	800	150/200	Ø515	1450	1700
SS93FR	SS7R-NS	3.75	9	40*200	420	180*180*12	600	800	180/250	Ø515	1900	2150
SS113FR	SS9R-NS	5.00	11	40*200	480	180*180*12	600	800	240/320	Ø515	2300	2650